
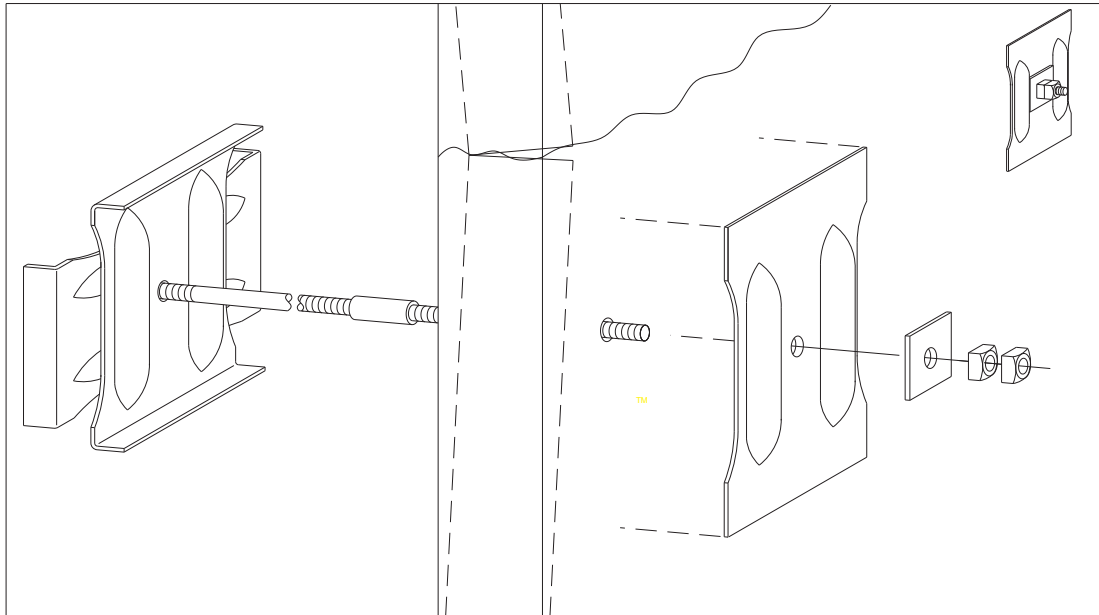


WALL ANCHOR KITS	
<i>CATALOG NO.</i>	<i>DESCRIPTION</i>
T150-0362	20 ° GALV. CROSSPLATE ANCHOR, 19 ° GALV. WALLPLATE W/ WASHER & 9' X 3/4" ROD W/ 2 NUTS
T150-0363	20 ° CLEAR-COATED CROSSPLATE ANCHOR, 19 ° CLEAR-COATED WALLPLATE W/ WASHER & 9' X 3/4" ROD W/ 2 NUTS
T150-0364	20 ° GALV. CROSSPLATE ANCHOR, 19 ° GALV. WALLPLATE W/ WASHER, 9' X 3/4" ROD W/ 2 NUTS & 4-1/2' X 3/4" ROD W/ 1 NUT & 1 COUPLING
T150-0365	20 ° CLEAR-COATED CROSSPLATE ANCHOR, 19 ° CLEAR-COATED WALLPLATE W/ WASHER, 9' X 3/4" ROD W/ 2 NUTS & 4-1/2' X 3/4" ROD W/ 1 NUT & 1 COUPLING
T150-0366	20 ° GALV. CROSSPLATE ANCHOR, 19 ° GALV. WALLPLATE W/ WASHER, 4-1/2' X 3/4" ROD W/ 1 NUT & 1 COUPLING & 4-1/2' X 3/4" ROD W/ 1 NUT
T150-0367	20 ° CLEAR-COATED CROSSPLATE ANCHOR, 19 ° CLEAR-COATED WALLPLATE W/ WASHER, 4-1/2' X 3/4" ROD W/ 1 NUT & 1 COUPLING & 4-1/2' X 3/4" ROD W/ 1 NUT

WALL ANCHOR ACCESSORY COMPONENTS	
<i>CATALOG NO.</i>	<i>DESCRIPTION</i>
T150-0348	FOUR EACH: GALV. WASHERS, GALV. SQUARE NUTS & GALV. COUPLINGS (ALL FOR 3/4" ROD)
T150-0349	9' X 3/4" GALV. ROD W/ 18" OF THREAD BOTH ENDS
T150-0350	4-1/2' X 3/4" GALV. ROD W/ 18" OF THREAD BOTH ENDS
T150-0351	4-1/2' X 3/4" ROD, ALL THREAD
T150-0372	25 ° GALV. WALLPLATE W/ GALV. WASHER
T150-0373	25 ° CLEAR-COATED WALLPLATE W/ CLEAR-COATED WASHER
T150-0374	24 ° GALV. CROSSPLATE ANCHOR
T150-0375	24 ° CLEAR-COATED CROSSPLATE ANCHOR

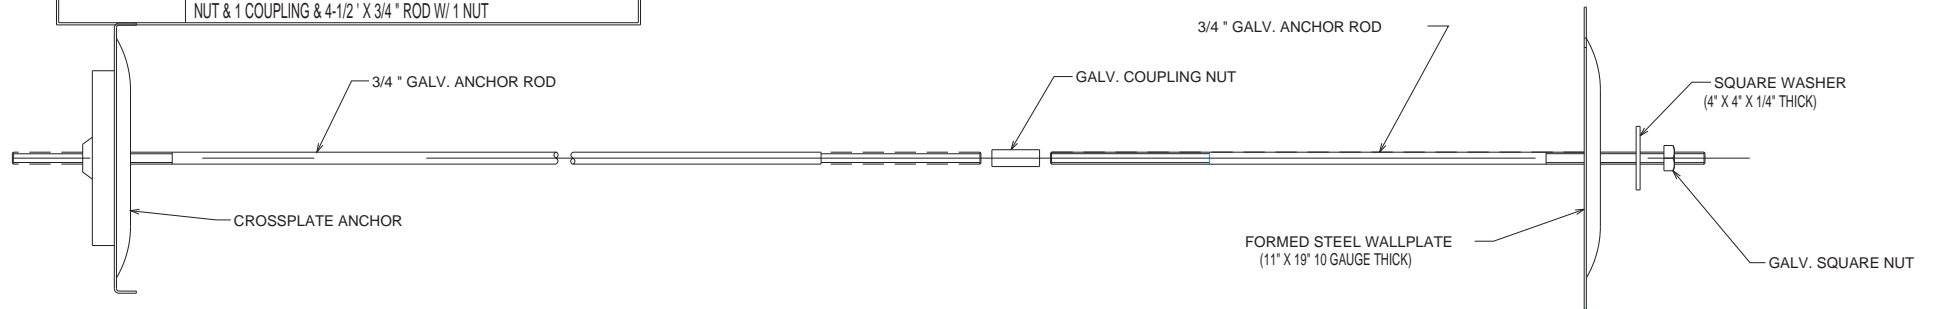

TYPICAL INSTALLATION OF DURA-GRIP WALL ANCHOR KIT

--NOTES--

1. MINIMUM ULTIMATE TENSILE STRENGTH OF 3/4" ROD IS 23,000 LBS.
3. FOR DETAILED INSTALLATION INSTRUCTION PLEASE REFER TO A. B. CHANCE BULLETIN 31-9806-LATEST REVISION.

LATEST EC NO.	REV.	DATE	CHANGED BY	RESP ENGINEER
EC0333	-	---	---	HOYT
KIT, DURA-GRIP WALL ANCHOR™				
REYNOLDS	11-12-98			
				SA150-0364

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL A. B. CHANCE COMPANY. HUBBELL A. B. CHANCE BULLETIN 31-9806-LATEST REVISION. © HUBBELL A. B. CHANCE COMPANY. © 1998