


50 KIP ULTIMATE COMPRESSION LOAD

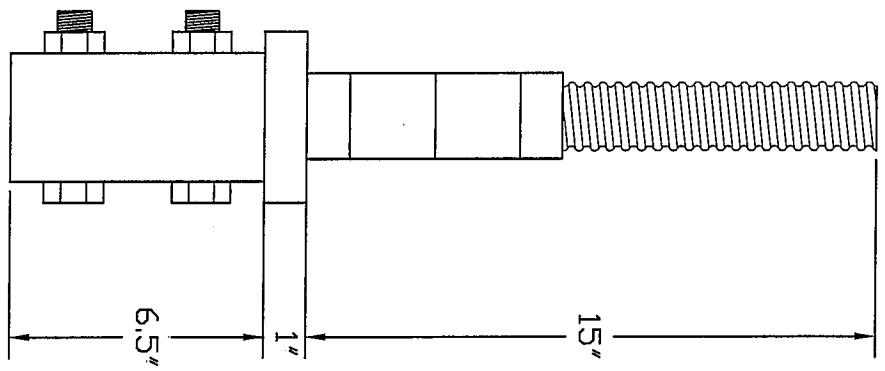

-NOTES-

1. FINISH: HOT DIP GALVANIZED PER ASTM A153-LATEST REVISION;
2. ALL MATERIAL TO BE NEW, UNUSED, AND WILL TRACEABLE MEETING THE FOLLOWING SPECIFICATIONS:
 THREAD BAR: #11 WILLIAMS FORM ALL-THREAD REBAR GRADE 75.
 NUTS: #11 WILLIAMS FORM SQUARE NUT PER ASTM A36.
 PLATE: 1" PLATE PER ASTM A572 GRADE 50, ALTERNATE MATERIAL PER ASTM A572 GRADE 80.
 PIPE: 3" NOMINAL SCHEDULE 40 PER ASTM A500 GRADE C, MINIMUM YIELD = 50KSI.
 ALTERNATE MATERIAL: PER ASTM A618 GRADE III, MINIMUM YIELD = 50KSI.
3. BOLTS: 3/4-10UNC-2A PER SAE J429 GRADE 5.
 IN COMPRESSION MINIMIZE THE UNSUPPORTED LENGTH OF THE THREAD BAR.

HUBBELL POWER SYSTEMS	
CONCEPTUAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO REPRODUCTION OR DISSEMINATION IS PERMITTED WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.	CHANCE TITLE LDP FOUNDATION
SIZE SB SA2784534	DWG NO. T2784534
DO NOT SCALE THIS DRAWING	DWN BY TLV DATE 6/27/11
REV --	SHEET 1 OF 1