
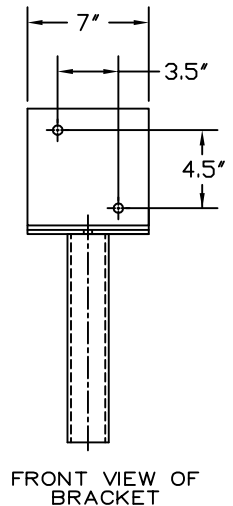
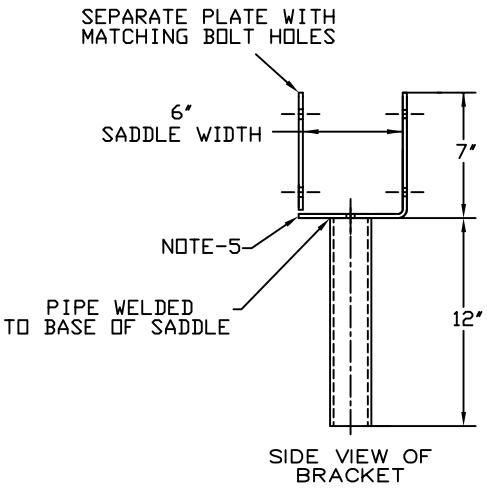



-NOTES-

1. THIS IS A CONCEPT DRAWING ONLY. ACTUAL DESIGN AND CONSTRUCTION OF WALKWAY AND HELICAL PIER SUPPORT SYSTEM IS LEFT TO OTHERS.
2. HELICAL PIERS CAN BE EITHER SINGLE OR MULTI-HELIX, THE NUMBER AND SIZE OF HELIX PLATES VARY DEPENDING ON PIER LOAD AND SOIL CONDITIONS.
3. HELICAL PIERS ARE INSTALLED (SCREWED) TO A MINIMUM DEPTH AND TORQUE AS REQUIRED ON THE CONSTRUCTION PLANS.
4. HOT DIPPED GALVANIZED PER ASTM A-153.
5. MATERIAL FOR SADDLE: 1/2" THICK HOT ROLLED STEEL
6. BOLTS: 1/2" DIA, HEX HEAD, 7.5" LONG WITH NUT AND LOCKWASHER SUPPLIED BY OTHERS.
7. 10000 LB MAX LOAD COMPRESSION ONLY.

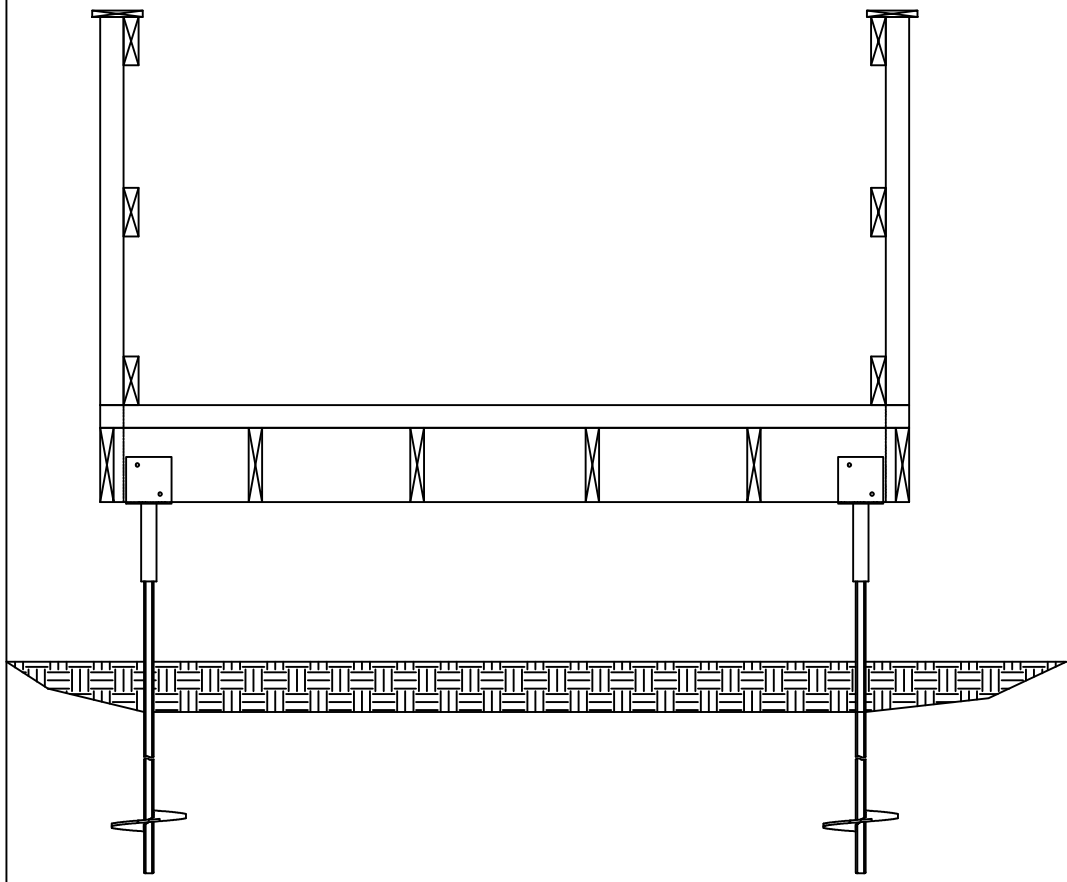

CHANCE		 HUBBELL POWER SYSTEMS <small>POWER SYSTEMS, INC.</small>	
<small>CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>		TITLE WALKWAY SUPPORT BRACKET	
		SIZE SB SA1101133	CAT / PART / ASSY NO. C1101133
DO NOT SCALE THIS DRAWING	DRN BY JWH	DATE 11/7/13	REV -- SHEET 1 OF 1