


TWO HOLES TO ACCEPT 1/2" DIA. BOLTS OR LAG SCREWS

7"

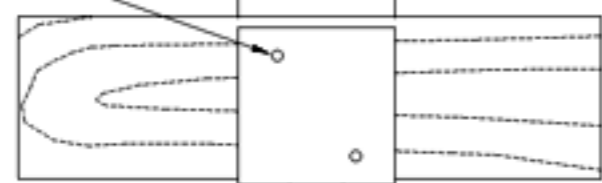

SEPARATE PLATE WITH MATCHING BOLT HOLES

3.50 SADDLE WIDTH

7

NOTE 5

PIPE WELDED TO BASE OF SADDLE

12

BRACKET ASSEMBLY INCLUDES:  
 1 EA. 3/4"X12" ALL THREAD BOLT  
 3 EA. 3/4" HH NUTS  
 1 EA. YOKE ASSEMBLY & HARDWARE

1-1/2" SS ANCHOR

*-NOTES-*

1. HOT DIPPED GALVANIZED PER ASTM A-153.
2. MATERIAL FOR SADDLE HOT ROLLED STEEL.
3. BOLTS: 1/2" DIA. HEX HEAD, 4-1/2" LONG WITH NUT AND LOCKWASHER. SUPPLIED BY OTHERS
4. 10000 LB MAX LOAD COMPRESSION ONLY
5. BEAM SADDLE FORMED FROM 1/4" THICK STEEL PLATE.

CHANCE TOLERANCE CHART



HUBBELL POWER SYSTEMS

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED. ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

TITLE WALKWAY SUPPORT BRACKET  
 W/LATERAL T/C SUPPORT OPTION

SIZE	DWG NO.	CAT / PART / ASSY NO.	REV
SB	SA110-0736	C110-0736	--
DO NOT SCALE THIS DRAWING	DRN BY KSH	DATE 5/19/04	SHEET 1 OF 1